


Chick Counter

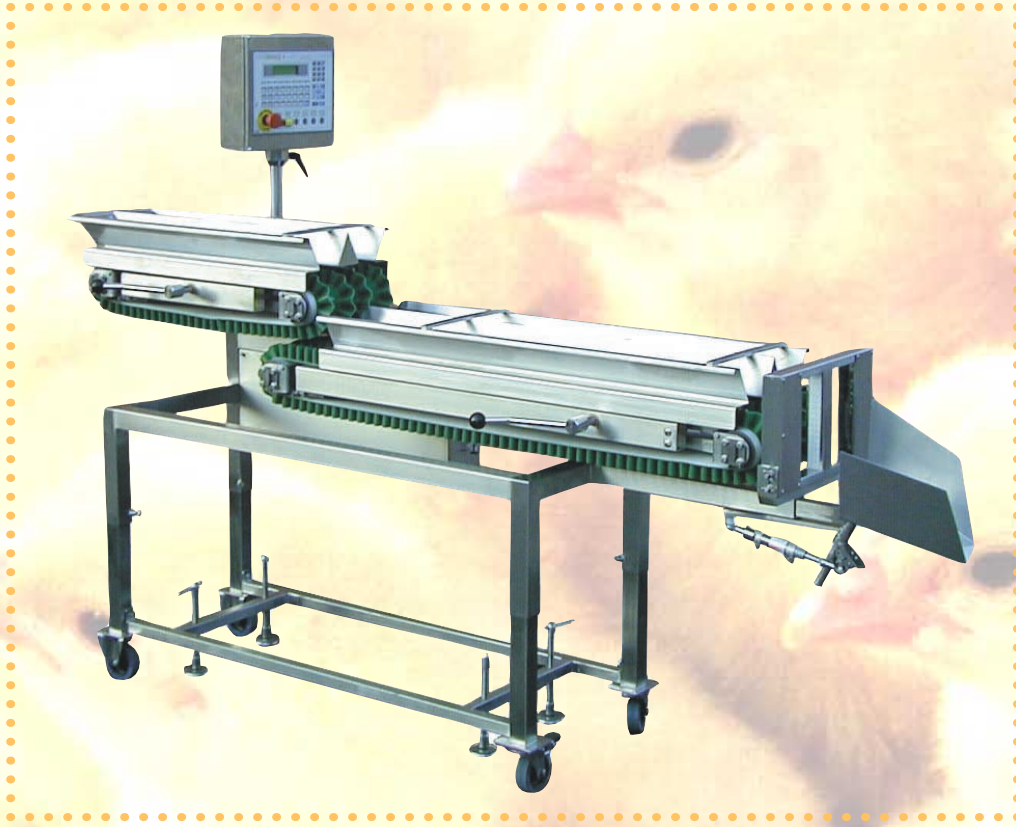

- **Easy to clean**
- **Automatic calibration**
- **Maximum accuracy**
- **Constructed on wheels**
- **Speed adjustable conveyor belts**
- **One control box - two counters**
- **User-friendly operation**
- **Constructed in stainless steel**

Handling quality chicks demands skill, experience, dedication, and a little support from LINCO!

Technical description

- **Easy to clean**
The counter-head, conveyor belts and side-frames can be removed in a few seconds without the use of tools. Constructed with drum-motors (no V-belts), electric cables and air hoses are placed inside the stainless steel framework.
- **Automatic calibration**
The software will automatically calibrate the system if the size of the chicks changes during the counting process. This ensures that there will be no delaying stop every time a new batch of chicks is counted.
- **High accuracy**
The counter is constructed with double conveyors and a two-gate counter head to give maximum accuracy with high capacity. The accuracy of the system is within the limit of 2 chicks per 1000.
- **Easy to move**
The counter is made in a light construction with four swivel wheels. After use it is easily rolled away from the automation line to give free access for washing.
- **Speed adjustable conveyor belts**
Constructed with frequency converters, the speed of the conveyor belts can be adjusted to the demanded capacity. This ensures gentle chick handling and maximum accuracy.
- **Two counters can be connected to one control unit**
The control box of the counter can operate two individual counters. If the capacity of the system is to be increased, an additional counter (slave) can be installed, without the cost of an extra control system.
- **User friendly operation**
Relevant data of the on-going operation is continuously updated on the display of the control panel. Programming and pre-setting are done easily on the keyboard of the control panel, and an extensive manual will guide the operator through all steps.

Technical specifications

Capacity:	40.000 chicks/hour
Electrical supply:	230V, 50/60 cycles
Power consumption:	0,6 kW
Air consumption:	10 l/min
Air pressure:	6 bars
Material:	Stainless steel 304

LINCO Set & Hatch A/S
Kristiansgade 12
DK-7430 Ikast
Denmark
Tel.: +45 96 60 15 00
Fax.: +45 96 60 15 01
E-mail: linco@set-hatch.com

